

W 250. Compact with High Performance

Flexibility and high performance at small dimensions. Product feed options: Single or multi-pack; in line or at an angle.




W 250

Design features

Solid tubular frame with central working plane at an ergonomic working height of ca. 800 mm. Film rolls outside the machine paneling for easy roll replacement. Safety paneling consisting of 15 mm thick hinged doors made of Makrolon. Painting of the machine on request.

Working principles

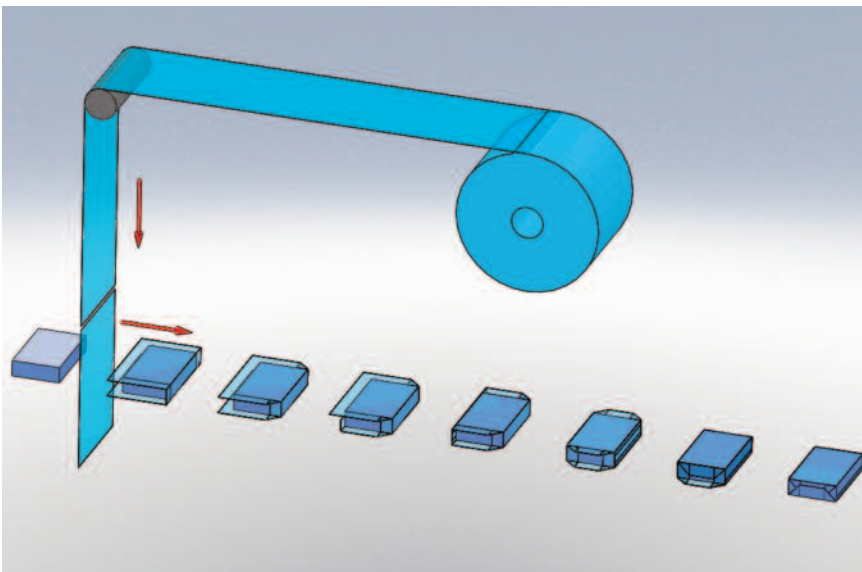

- Film draw-off by means of multi-grip tongs
- Film cut-off by means of rotating carbide cutters
- Infinitely adjustable format range with digital display
- Hardened radial cams
- Low maintenance due to encapsulated bearings and gears

Additional options

- Standard tear-off strip or jumbo tear-off strip with separate drive
- Turning station for wrapped product sets at the machine exit
- Integration of a separate label dispenser or separate printing

Technical data

- Film width up to 250 mm
- Draw-off length up to 250 mm
- Machine performance max. 160/min

